

VTH1550CH-S2

IP Indoor Monitor



Features

- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



Technical Specification

Model	VTH1550CH-S2
-------	--------------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Video

Video Compression	H.264
-------------------	-------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	All-direction Microphone
-------------	--------------------------

Audio Output	Built-in Loudspeaker
--------------	----------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

LCD Screen	7" 800x480
------------	------------

Operation Mode

Input	Touch buttons and capacitive screen
-------	-------------------------------------

Interface

Alarm In	6
----------	---

Alarm Out	1
-----------	---

RS485	1
-------	---

Network

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------

General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation

Surface

Power	DC 12V/ supply directly by VTNS1060A
-------	--------------------------------------

Power Consumption	Works7W
-------------------	---------

Working Temperature	-10°C to +55°C
---------------------	----------------


Relative Humidity	10%RH-90%RH
-------------------	-------------

Dimensions	200.5mm×136.5mm×22.0mm
------------	------------------------


Weight	0.8kg
--------	-------

VTH1550CH-S2

Dimensions

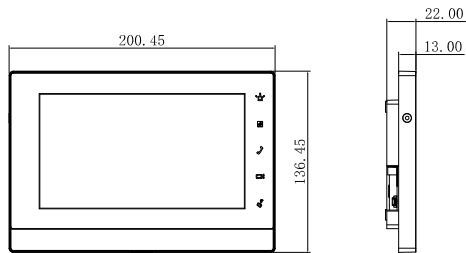

View Area

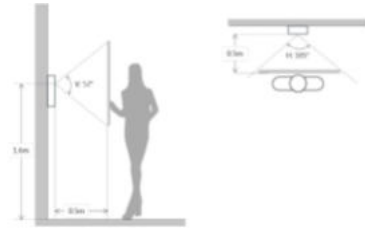

Application

