

VTO1210C-X-S1

Apartment Outdoor Station



Features

- HD CMOS camera
- Stainless steel panel, IP54, IK07
- Night vision & Voice indication
- Local card opening
- Video & Audio messaging
- Surface & Flush mounted



Technical Specification

Model	VTO1210C-X-S1
-------	---------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/3" 1.3MP CMOS
Lens	4mm
Angle of View	H:71°, V:52°, D:95°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

LCD Screen	3" STN 128x64
------------	---------------

Operation Mode

Keypad	Mechanical Button
Reader	Mifare Card

Approaching Induction

Body approaching	0.6m
------------------	------

Interface

Door Control	1
--------------	---

Alarm In	2(1ch unlock button, 1ch feedback)
----------	------------------------------------

RS485	1
-------	---


Network

Ethernet	10M/100Mbps
Network Protocol	TCP/IP


General

Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless steel
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	143.0mm×406.0mm×42.0mm
Weight	1.6Kg

Dimensions

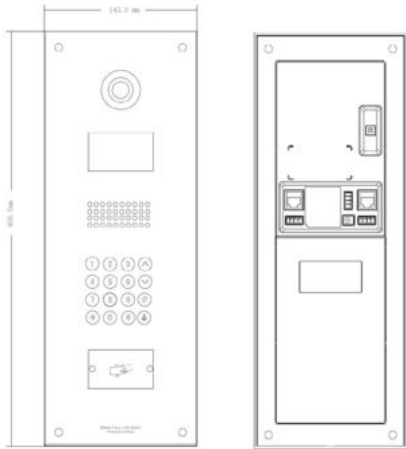

View Area

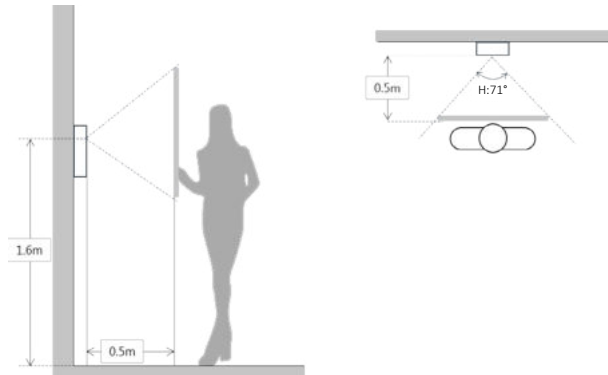

Application

