


# Front Panel for 2 Modules



#### **Features**

- Material: Stainless Steel
- Size: 257mm\*145 mm\*11 mm
- Weight: 0.5kg
- Front Panel

### **Dimensions**

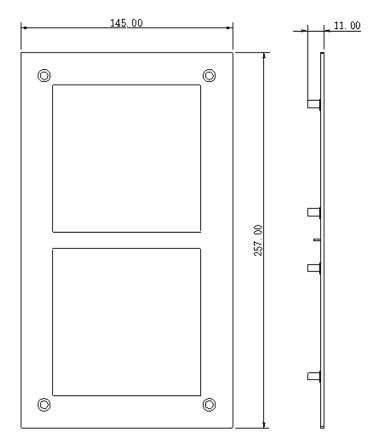




## **Surface Mounted Box for 2 Modules**



#### **Features**

- Material: Aluminum
- Size: 261.4 mm\*149.4 mm\*80.6 mm
- Weight: 0.8kg
- Surface Mounted Box

#### **Dimensions**

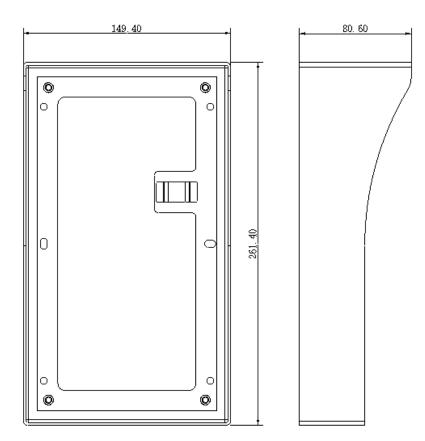



#### Installation

Component Name	Illustration	Quantity
M4×40 inner hex flower sunk head flat tail machine screw		4
M3×6 cross recessed countersunk flat tail machine screw		4 in each module
ST3×18 cross recessed countersunk head tail tapping screws	{mmmmmp	6
White expansion tube ⊄ 6x30mm		6

- Step 1. Install case on wall. Fix with screw (ST3×18 cross recessed countersunk head tail tapping screws), and the case is fastened
- Step 2. Align the device on front panel with hole position. Fix with screw (M3×6 cross recessed countersunk flat tail machine screw), and the module is fastened on front panel.
- Step 3. Fix front panel on case according to hole position, fix with (M4×40 inner hex flower sunk head flat tail machine screw), and front panel is fastened on the case.
- Step 4. Write room no. on provided name card or name of resident. Insert name card cover.

#### Note:

- Name card and name card cover are included in accessories by default.
- Module VTO has two packages of 2 modules and 3 modules. The figure takes 3 modules as an example.
- You may power up device only after all modules are well connected, otherwise module connected after power up will not operate.

