


IP BULLET CAMERA, 4MP WITH POE

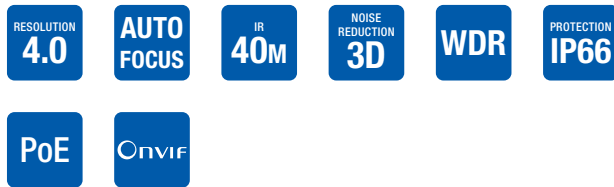

FEATURES

- 4 MP resolution with CMOS sensor
- H.264 and H.265
- IR illumination up to 40 meters
- 2,8 ~ 12 mm motorized lens with autofocus
- 2 way audio
- WDR, 3D-DNR, motion detection, privacy mask
- Integration with other brands by Onvif 2.4, SDK and RTSP
- Compatible with NEXTGEN ZVR/NVR via Onvif
- Intuitive P2P with QR code, Plug & Play cameras
- Free Webserver and CMS
- IP66
- 3 AXIS bracket with wiring holes
- PoE supported
- Reset button and waterproof cable

ACCESSORIES



HYU-251
Connection base

CAMERA

Image sensor	1/3 CMOS, 4 MP
Effective pixels	2592(H) x 1520(V)
Frames per second	PAL/NTSC: 25 fps @4MP (2592x1520)
IR illumination	5 led array: 40 meters
Minimum illumination	0 lux IR ON

LENS

Lens	2,8 ~ 12 mm
Lens type	Motorized
Focus mode	Auto

AUDIO

Audio channels	1 in / 1 out
----------------	--------------

FUNCTIONS

Day/night	Auto (ICR), Color, B/W
OSD menu	Supported
Backlight compensation	WDR
Noise reduction	3D-DNR
Motion detection	Supported
Privacy mask	Supported

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC
Power supply in/out	12V (to power external microphone)
PoE	Supported
Working temperature	-20°C ~ +60°C
RH	10% ~ 90% HR
Protection	IP66

PHYSICAL FEATURES

Case	Metal
Dimensions	285 x 105 x 105 mm