

DHI-ASI6214S-PW

Face Recognition Access Controller



Technical Specification

System

Main Processor	Embedded Processor
Button Type	Touch button
Network Protocol	UDP; TCP; IPv4; RTSP; SIP; P2P; RTP
OSDP Protocol	Yes
Interoperability	CGI; ONVIF
SDK and API	Yes

Basic

Product Type	Standalone
Display Screen	4.3" LCD
Screen Type	Capacitive Touchscreen
Screen Resolution	272 (H) × 480 (V)
Camera	2-MP CMOS HD dual-lens camera
WDR	DWDR
Light Compensation	Auto IR
Voice Prompt	Yes
Buzzer	Yes
Casing Material	PC+GF

Function

Unlock Mode	Card, remote, password, QR code, Fingerprint, face and combination unlock
Card Type	IC card; Desfire card (EV3, Compatible with Dahua card by default)
Period List	128 periods

- 4.3 inch glass touch screen with a resolution of 272 × 480.
- 2-MP wide-angle dual-lens camera with IR illumination and DWDR.
- Multiple unlock methods including fingerprint, face, card and password.
- Supports 6,000 users, 6,000 faces, 6,000 passwords, 6,000 fingerprints, 10,000 cards, 50 administrators, and 300,000 records.
- Recognizes faces 0.3 m to 1.5 m away (0.98 ft-4.92 ft); face recognition accuracy rate of 99.9% and the 1:N comparison time is 0.2 s per person.
- Supports improved security and to protect against the device being forcefully opened, security module expansion is supported.
- Features face mask detection and safety helmet detection.
- Supports visitor QR code and doorbell function.
- Supports making video calls and using the app to receive alarm notifications, remotely unlock doors and to perform other tasks.
- TCP/IP and Wi-Fi connection.
- PoE power supply.
- IP65 rated.
- Plays advertisements in video and image format.

Holiday Period	128 periods
Network Update	Yes
First User Unlock	Yes
Remote Verification	Yes
Restricted List/Trusted List	Yes
Advertisement Playing	Plays advertisements in video and image format
Wi-Fi	Yes
Wireless Standard	IEEE802.11b/802.11g/802.11n
Wireless Frequency Range	2.4 GHz
Peripheral Card Reader	1 × RS-485 card reader 1 × Wiegand card reader
Multi-user Authentication	Yes
Real-time Monitoring	Yes
Multi-factor Authentication	Yes
Capture Function	Yes
Web Configuration	Yes
Auto Registration	Yes

RFID

Modulation Type	ASK
Frequency Range	13.56 MHz
Max. Transmission Power	42dBuA/m @10m

DHI-ASI6214S-PW

Network

Max. Transmission Power	≤20dBm@2400-2483.5 MHz
-------------------------	------------------------

Performance

Card Reading Distance	0 cm–3 cm (0"–1.18")
Face Recognition Height Range	1.1 m–2.0 m (3.61 ft–6.56 ft)
Face Recognition Distance	0.3 m–1.5 m (0.98 ft–4.92 ft)
Face Recognition Accuracy	99.9%
Face Recognition Time	0.2 s
Fingerprint Verification Mode	1:N

User

User (Card) Type	Normal user; VIP users; patrol users; guest user; blocklist user; other user; custom user 1; custom user 2
------------------	--

Capacity

User Capacity	6,000
Face Image Capacity	6,000
Fingerprint Capacity	6,000
Card Capacity	10,000
Password Capacity	6,000
Record Capacity	300,000

Port

RS-485	1
Wiegand	1
USB	1
Network Port	1 × RJ-45 10/100 Mbps self-adaptive Ethernet port
Alarm Input	1
Alarm Output	1
Alarm Linkage	Yes
Exit Button	1
Door Status Detection	1
Lock Control	1


Alarm

Anti-pass Back	Yes
Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Duress Fingerprint	Yes
Illegal Card Exceeding Threshold	Yes

General


Power Adapter	Included
Power Supply	Standard PoE 12 VDC, 1.5 A
Protection	IP65
Power Consumption	≤12 W
Product Dimensions	180.1 mm × 90.1 mm × 27.0 mm (7.09" × 3.55" × 1.06") (L × W × H)
Packaging Dimensions	268 mm × 136 mm × 78 mm (10.55" × 5.35" × 3.07") (L × W × H, in an inner carton) 590 mm × 432 mm × 302 mm (23.23" × 17.01" × 11.89") (L × W × H, protection box)
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	0%–90% (RH), non-condensing
Operating Altitude	0 m–1,300 m (0 ft–4265.09 ft)
Operating Environment	Outdoor; Indoor
Gross Weight	0.70 kg (1.54 lb)
Accessory	Wall mount bracket (included)
Installation	Turnstile mount; 86 case mount; Wall mount; surface mount

Installation

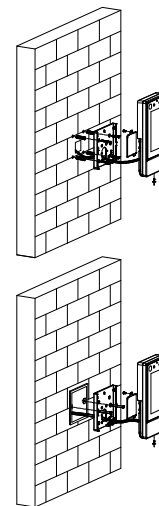

DHI-ASI6214S-PW

Dimensions (mm[inch])

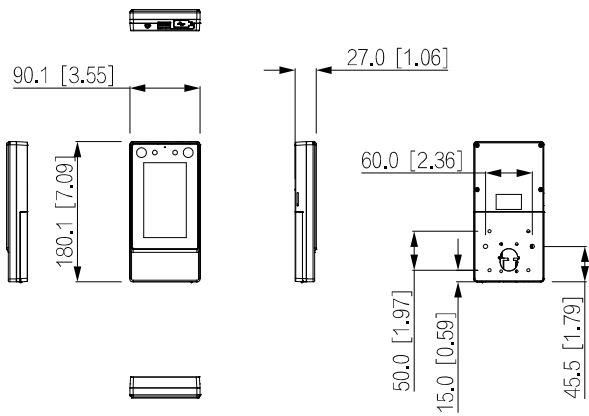

Application

